


**SECURITY BRACKET REMOVAL**



- ① Prior to installation, detach metal security bracket from clock by inserting included release key into slot located on back of clock.
- ② Push key all the way into slot. Key will slide easily until some resistance from locking tab is felt.
- ③ With key fully engaged, slide the security bracket down and off of the clock.
- ④ When ready to hang after setting up the clock see your digital bracket template provided.

**View of back of clock with bracket attached.**

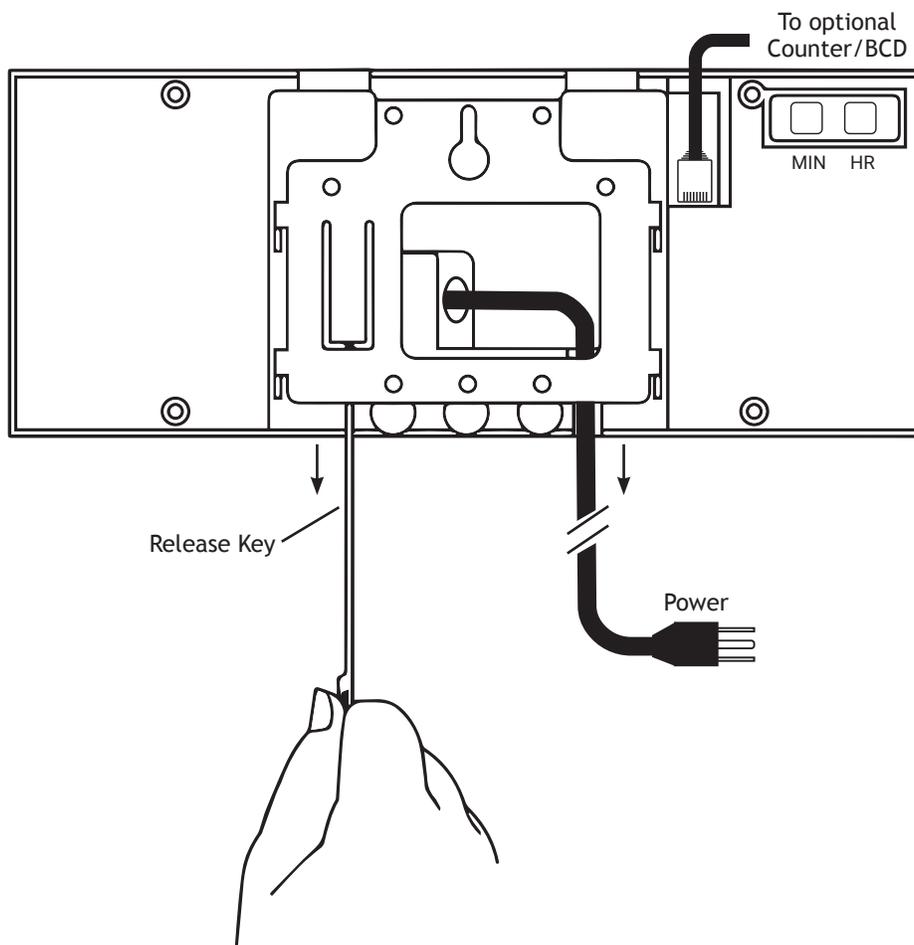


**SET TIME**

- ① Plug clock into standard electrical outlet. Clock displays 88:88 (DIG-4B) or 88:88:88 (DIG-6B).

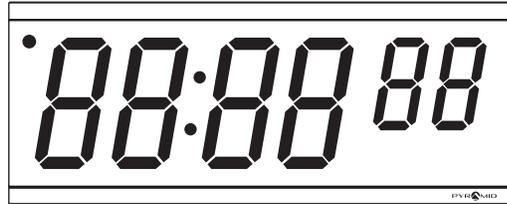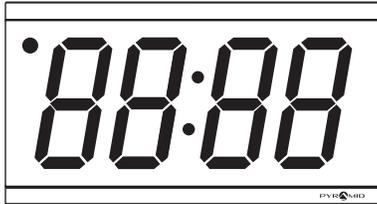


- ② To set time, hold clock display facing towards you and locate two buttons on back of clock. With clock display facing you, press left hand button to set hour. Press right hand button to set minute. PM is indicated by the PM indicator light in upper left hand corner.

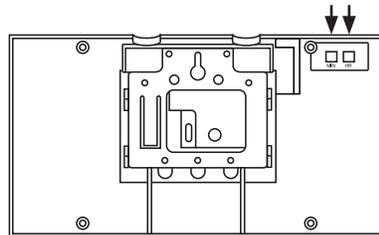

**24 HOUR MODE (MILITARY TIME)**

- ① To change clock from 12 Hour to **24 Hour mode**, locate two buttons on back of clock. Press both buttons at same time and hold until clock displays “24” then release buttons. Clock will display 00:00. Set time per “SET TIME” instructions above.

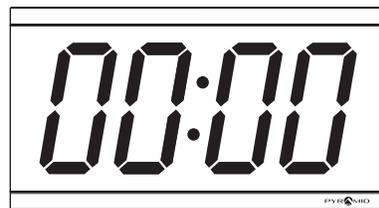

- ② To return to **12 Hour mode**, press two buttons again at the same time until clock displays “12”, then release buttons. Clock will display 12:00 when ready to set time.



### OPTIONAL SYNCHRONIZATION

The DIG-48 and DIG-68 standalone clocks are able to interface with any Pyramid Device with BCD output to synchronize time to one or multiple clocks. Connection is made with an RJ45 cable to the BCD output on the device.

### ACCESSORIES

| PART #     | DESCRIPTION                                  |
|------------|--|
| 7000       | TimeTrax Sync™ Master Clock Controller (BCD) |
| 43193-3    | DIG-4B/DIG-6B Wire Guard Kit                 |
| 42689      | Clear Washed Enclosure                       |
| CTPLATEKIT | Count UP/DOWN Digital Time Controller        |
| 41269      | RJ45 BCD Cable, 50'                          |
| 41314      | RJ45 BCD Cable, 100'                         |
| 41270      | RJ45 Y-Splitter Cable                        |
| 42429E-1   | Security Mount Replacement Key               |
| 42247J     | Digital Security Mount Replacement Bracket   |

### 1-YEAR LIMITED WARRANTY

The manufacturer warrants this equipment to the original user against defective material or workmanship for a period of one year from the date of purchase. The manufacturer's responsibility under this warranty is limited to the repair or replacement of the defective part or parts.

The manufacturer reserves the right to determine whether the parts failed because of defective material, workmanship, or other causes. Failure caused by accident, alteration, misuse or improper packaging of returned unit is not covered by this warranty. All warranty repairs must be done by Pyramid Time Systems, LLC. Any repair to the equipment other than Pyramid Time Systems voids the warranty. Users in countries other than the USA should contact the Dealer from whom the unit was purchased. The rights under this warranty are limited to the original user and may not be transferred to subsequent owners.

### TECHNICAL SUPPORT

Should you need to speak live to one of our representatives, please call toll-free (US/Canada) at 888.479.7264 during regular business hours (8:30AM-5PM EST, M-F) or email: [customer\\_support@ptitime.com](mailto:customer_support@ptitime.com)